


532nmレーザー用ビームエキスパンダー

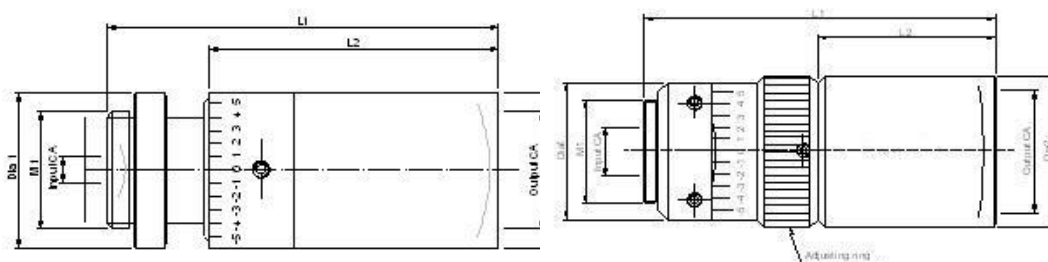

型番	倍率	入射CA (mm)	出射CA (mm)	M1	Dia1 (mm)	Dia2 (mm)	L1 (mm)	L2 (mm)
IN-BEX-532-2X2	2.0	8.0	23.0	M22x0.75	33.0	36.0	54.8	45.8
IN-BEX-532-2XA	2.0	13.0	23.0	M22x0.75	30.0	30.0	82.7	67.7
IN-BEX-532-2X	2.0	6.0	23.0	M22x0.75	30.0	30.0	83.0	71.0
IN-BEX-532-3X	3.0	6.0	23.0	M22x0.75	30.0	30.0	83.0	67.0
IN-BEX-532-4X	4.0	6.0	23.0	M22x0.75	30.0	30.0	83.0	67.0
IN-BEX-532-5X	5.0	8.0	24.0	M30x0.5	30.0	30.0	83.0	65.0
IN-BEX-532-6X	6.0	6.0	23.6	M22x0.75	30.0	30.0	83.0	67.0
IN-BEX-532-8X1	8.0	6.0	16.0	---	25.0	25.0	---	67.0
IN-BEX-532-10X2	10.0	4.0	30.0	M22x0.75	36.0	42.0	82.2	73.2
IN-BEX-532-10X	10.0	6.0	23.0	M22x0.75	30.0	30.0	83.0	67.0
IN-BEX-532-12X	12.0	7.0	24.0	M22x0.75	30.0	30.0	83.0	67.0
IN-BEX-532-15X	15.0	6.0	32.0	M30x1	40.0	M43x0.50	85.0	67.0
IN-BEX-532-15V	15.0	6.0	32.0	M22x0.75	40.0	45.0	85.0	---
IN-BEX-532-18X	18.0	5.0	40.0	20.5	20.5	47.0	176.5	163.0
IN-BEX-532-20X-Q	20.0	8.0	32.0	M22x0.75	---	45.0	92.3	75.3
IN-BEX-532-30X	30.0	5.0	28.0	M22x0.75	30.0	46.0	108.7	123.7
IN-BEX-1064-532-2X ※	2.0	13.0	22.0	M30x1	36.0	33.0	94.4	84.4

※ 1064nmと532nmの両波長対応