


CO2用固定ビームエキスパンダー

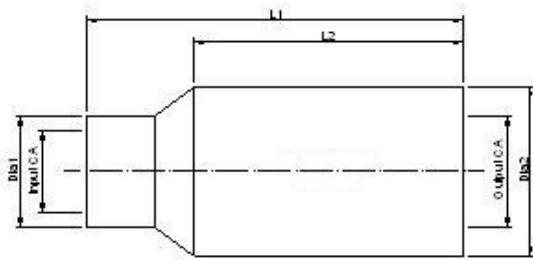

型番	倍率	入射CA (mm)	出射CA (mm)	Dia1 (mm)	Dia2 (mm)	L1 (mm)	L2 (mm)
IN-BEX-10.6-1.5X	1.5	13.0	16.0	20.0	--	34.5	--
IN-BEX-10.6-2A	2.0	15.0	17.0	22.0	--	35.0	--
IN-BEX-10.6-2L	2.0	27.0	53.0	M44x1	63.0	72.0	47.0
IN-BEX-10.6-2.5	2.5	15.0	20.0	27.0	--	55.0	--
IN-BEX-10.6-3X	3.0	11.0	16.0	20.0	20.0	59.0	--
IN-BEX-10.6-3H	3.0	10.0	15.0	20.0	20.0	61.0	--
IN-BEX-10.6-3C	3.0	13.0	20.0	20.0	28.0	110.0	60.0
IN-BEX-10.6-3B	3.0	12.5	20.0	20.0	28.0	59.0	29.0
IN-BEX-10.6-3A	3.0	10.0	15.0	20.0	20.0	61.0	--
IN-BEX-10.6-3.3	3.3	10.0	15.0	21.0	21.0	67.0	--
IN-BEX-10.6-4C	4.0	12.0	23.0	20.0	30.0	135.0	90.0
IN-BEX-10.6-4A	4.0	20.0	30.0	20.0	31.0	67.0	48.0
IN-BEX-10.6-4	4.0	10.0	20.0	20.0	28.0	67.0	46.0
IN-BEX-10.6-5	5.0	12.0	23.0	20.0	30.0	72.0	47.0
IN-BEX-10.6-5A	5.0	12.0	28.0	20.0	36.0	70.0	45.0
IN-BEX-10.6-6A	6.0	10.0	28.0	20.0	36.0	75.0	40.0
IN-BEX-10.6-8	8.0	13.0	26.0	20.0	36.0	120.0	75.1
IN-BEX-10.6-8A	8.0	10.0	30.0	20.0	36.0	73.0	45.5